

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:2A AC,DC
- 2.Voltage rating:125V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2008H-XP-X-HF



Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions



28.00	30.40	15	14.00	16.40	8
26.00	28.40	14	12.00	14.40	7
24.00	26.40	13	10.00	12.40	6
22.00	24.40	12	8.00	10.40	5
20.00	22.40	11	6.00	8.40	4
18.00	20.40	10	4.00	6.40	3
16.00	18.40	9	2.00	4.40	2
A	B	PIN	A	B	PIN

TOLERANCE		PART NO.		东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X.	X.XXX ±0.1	FU2008H-XP-X-HF		TITLE. 2.00mm Pitch Board In Housing		
X.X ±0.30		DRAWING NO.				
X.XX ±0.20	Angular ±2°	C-FU2008H-XP-X-HF				
	UNIT: mm	APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1OF1	REV. A
					SCALE 5: 1	
DWG TYPE. Customer Drawing						

		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

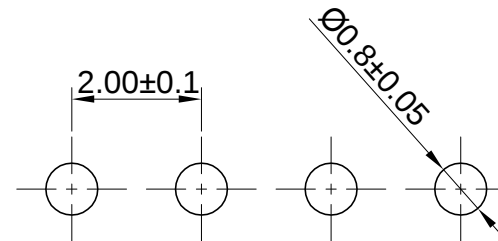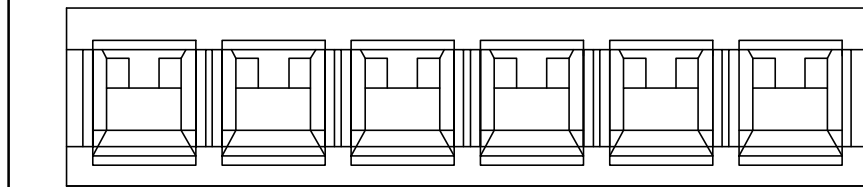

PCB LAYOUT

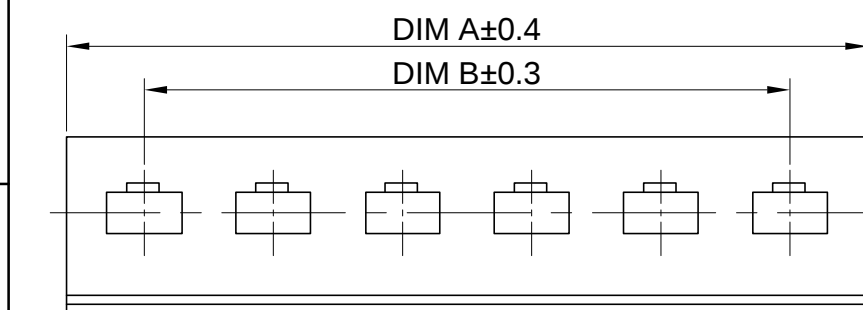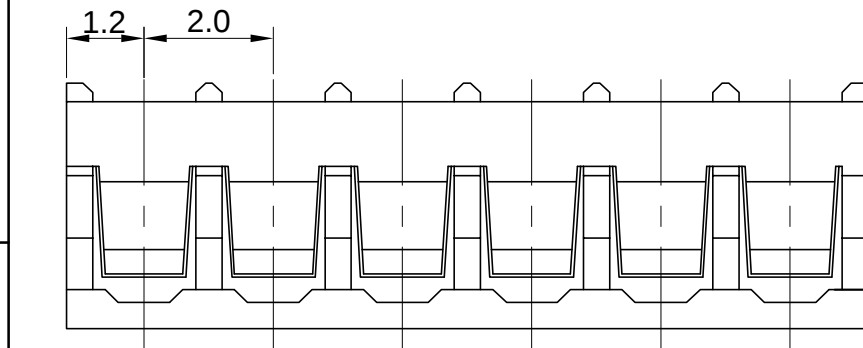

D

A

B

C

D