

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:


- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40℃~+105℃
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2509H-XP-X-HF



Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions

			20.00	24.00	9
37.50	41.50	16	17.50	21.50	8
35.00	39.00	15	15.00	19.00	7
32.50	36.50	14	12.50	16.50	6
30.00	34.00	13	10.00	14.00	5
27.50	31.50	12	7.50	11.50	4
25.00	29.00	11	5.00	9.00	3
22.50	26.50	10	2.50	6.50	2
A	B	PIN	A	B	PIN

TOLERANCE		PART NO.		东莞市福朗连接器制造有限公司	
X.	X.XXX ±0.1	FU2509H-XP-X-HF		DongGuan FuLang Connector Manufacturing Co., LTD	
X.X ±0.30		DRAWING NO.		TITLE.	
X.XX ±0.20	Angular ±2°	C-FU2509H-XP-X-HF		2.50mm Pitch Board In Housing	
	UNIT: mm	APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
DWG TYPE.					SCALE 5: 1
Customer Drawing					REV. A

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

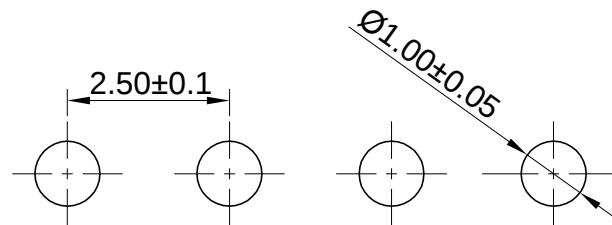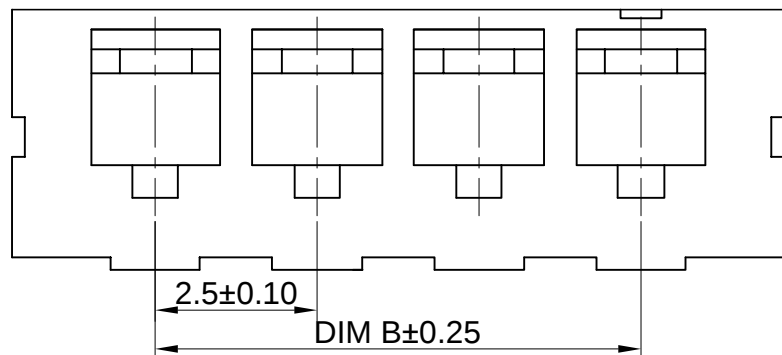

PCB LAYOUT

