


RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Spec. PLS. Refer To PS-FU2509

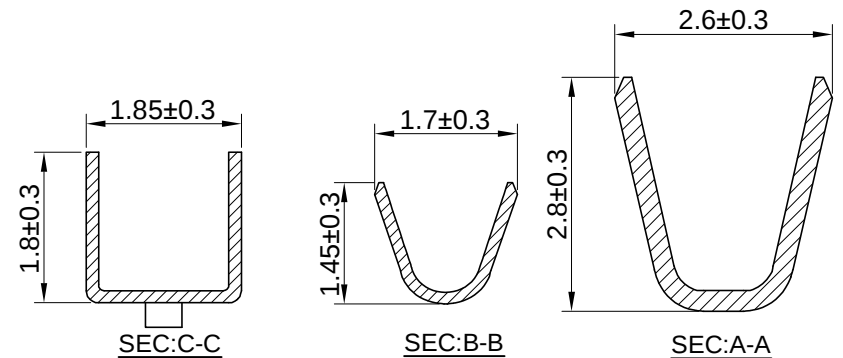

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU2509-T0B-B1	AWG#22~#28	1.7mm Max	Brass	Tin over Nickel	10000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X. XXX ±0.1		FU2509-T0B-B1			
X.X ±0.30					
X.XX ±0.20	Angular ±2°	DRAWING NO.	TITLE.		
		C-FU2509-T0B-B1	2.50mm Pitch Board In Terminal		
DWG TYPE.		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
Customer Drawing					SCALE 10:1
					REV. A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.26