



RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:


- 1.Current rating:1A AC,DC
- 2.Voltage rating:50V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:100MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Spec. PLS. Refer To PS-FU1002

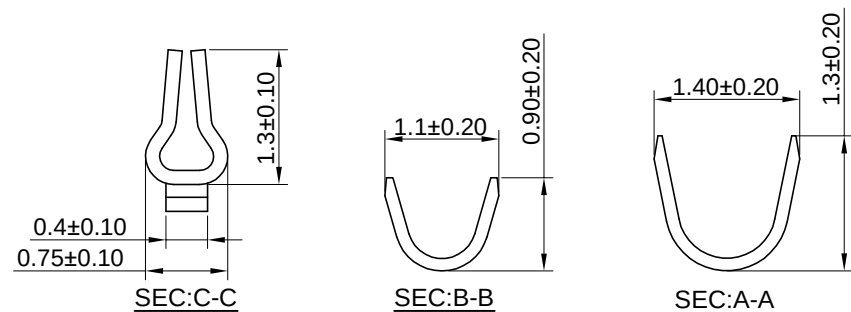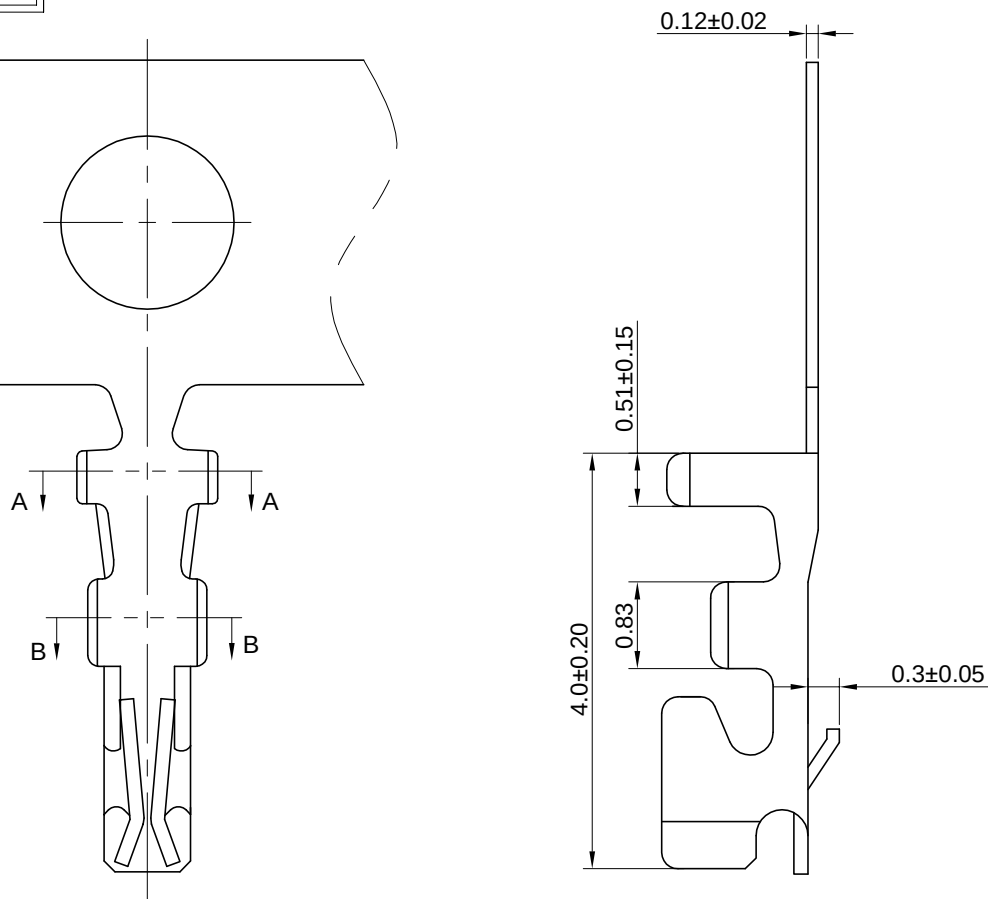

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU1002-T0P-B1	AWG#28~#32	0.8mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs
FU1002-T0P-B2	AWG#28~#32	0.8mm Max	Phosphor Bronze	Au over Nickel	15000Pcs

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°

UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1002-T0P-XX

DRAWING NO.

C-FU1002-T0P-XX

APPROVED BY

CHECKED BY

DRAWN BY

PAGE 10F1

REV. A

SCALE 10:1

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

1.00mm Pitch Crimp Terminal

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.05



RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:50V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:100MΩMin.
- 6.Withstanding voltage:500V AC/minute
- 7.Spec. PLS. Refer To PS-FU1002

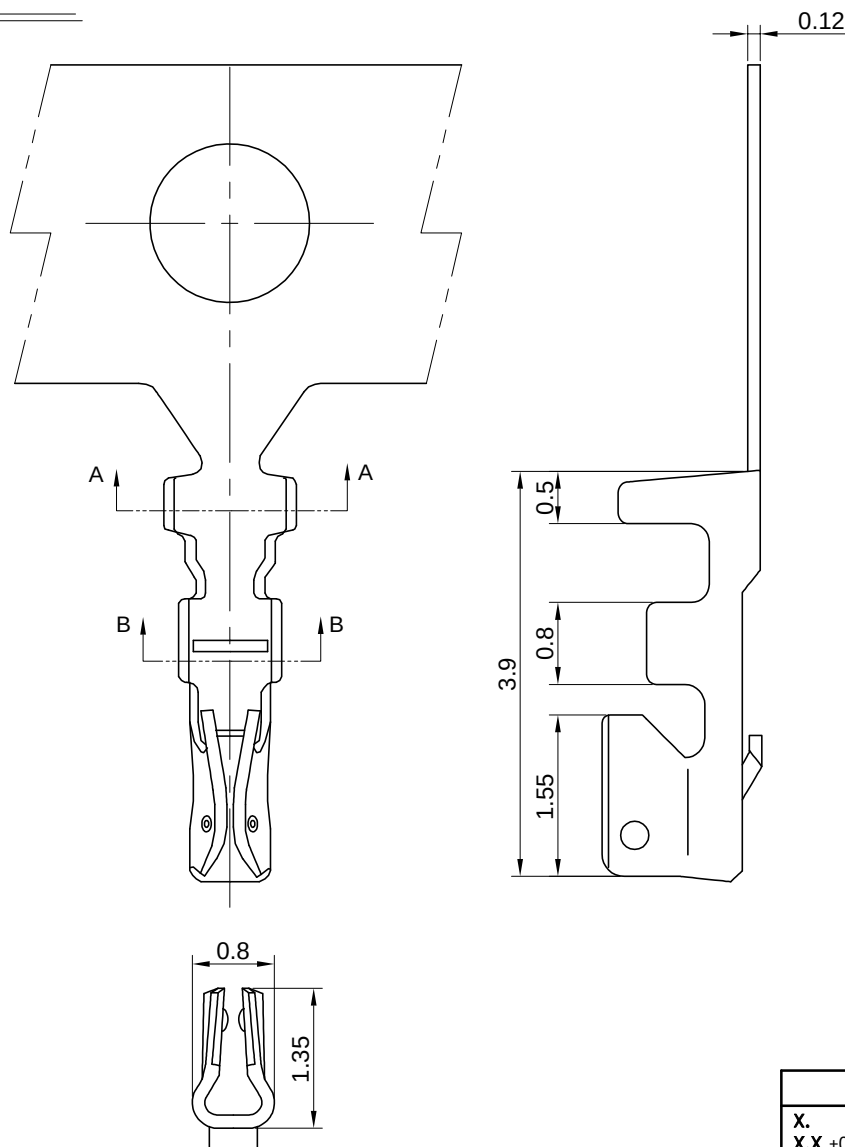


SEC A-A



SEC B-B

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU1002-TAP-B1	AWG#28~#32	0.8mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs
FU1002-TAP-B2	AWG#28~#32	0.8mm Max	Phosphor Bronze	Au over Nickel	15000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DongGuan FuLang Connector Manufacturing Co., LTD		
X. X.XXX ±0.1		FU1002-TAP-XX			
X.X ±0.30		DRAWING NO.	TITLE.		
X.XX ±0.20	Angular ±2°	C-FU1002-TAP-XX	1.00mm Pitch Crimp Terminal		
 UNIT: mm		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 10F1
					SCALE 10:1
DWG TYPE.					REV. A
Customer Drawing					

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE