

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA




Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:100V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:30mΩMax.
- 5.Insulation resistance:500MΩMin.
- 6.Withstanding voltage:300V AC/minute
- 7.Material:LCP UL 94V-0
Contact Post:0.2mm Copper Alloy
- 8.Bill Of Part No.:
FU1004WRS-AXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
.	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions


30	29.00	29.50	33.95
20	19.00	23.50	23.95
14	13.00	17.50	17.95
8	7.00	11.50	11.95
PIN	A	B	B

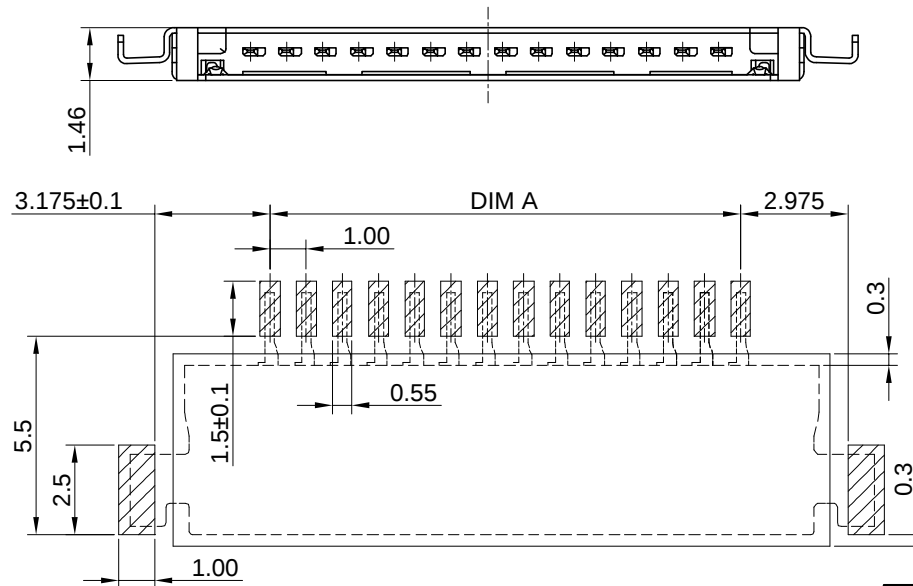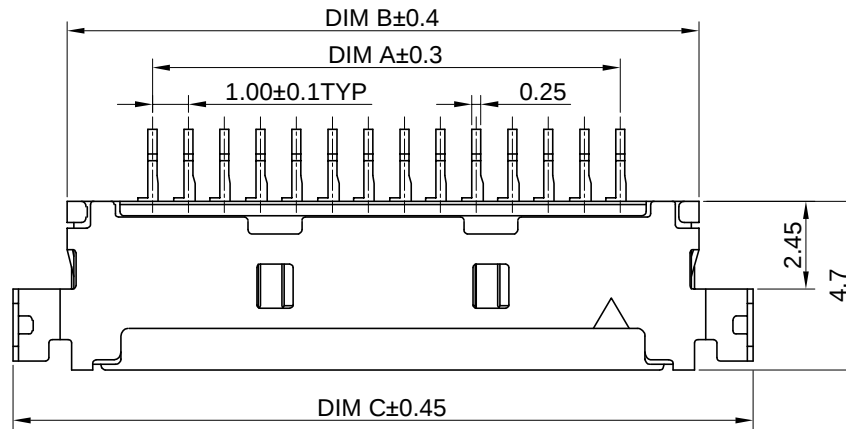

PCB LAYOUT

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.40	
X.XX ±0.25	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1004WRS-AXP-X-HF

DRAWING NO.

C-FU1004WRS-AXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 1.00mm PITCH RINGH
ANGLE SMT TYPE

A		FOR NEW DRAWING	GuobaoLi	2017.12.02
REV.	ECN NO	REVISION RECORD	DRAW	DATE

6 QMI-P12-05-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:100V AC,DC
- 3.Temperature range:-40℃~+105℃
- 4.Contact resistance:30mΩMax.
- 5.Insulation resistance:500MΩMin.
- 6.Withstanding voltage:300V AC/minute
- 7.Material:LCP UL 94V-0
Contact Post:0.2mm Copper Alloy
- 8.Bill Of Part No.:

FU1004WRS-AXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
.	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green


9.Ordering Information & Dimensions

30	29.00	33.55	33.95
20	19.00	23.55	23.95
14	13.00	17.55	17.95
8	7.00	11.55	11.95
PIN	A	B	C

PCB LAYOUT

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1004WRS-XP-X-HF

DRAWING NO.

C-FU1004WRS-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD

TITLE. 1.00mm PITCH (V- SMT TYPE)

A		FOR NEW DRAWING	GuobaoLi	2017.12.02
REV.	ECN NO	REVISION RECORD	DRAW	DATE

6 QMI-P12-05-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:1A AC,DC
- 2.Voltage rating:100V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:30mΩMax.
- 5.Insulation resistance:500MΩMin.
- 6.Withstanding voltage:300V AC/minute
- 7.Material:LCP UL 94V-0
Contact Post:0.2mm Copper Alloy
- 8.Bill Of Part No.:
FU1004WVS-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
.	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green

9.Ordering Information & Dimensions

20	23.9	19.0	21.25	20.95
14	17.9	13.0	15.25	14.95
PIN	A	B	C	D

TOLERANCE

X.	X.XXX ±0.10
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU1004WVS-XP-X-HF

DRAWING NO.

C-FU1004WVS-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY


PAGE
1 OF 1

SCALE
1: 1

REV.

A

东莞市福朗连接器制造有限公司
DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD
TITLE. 1.00mm PITCH RINGH
ANGLE SMT TYPE

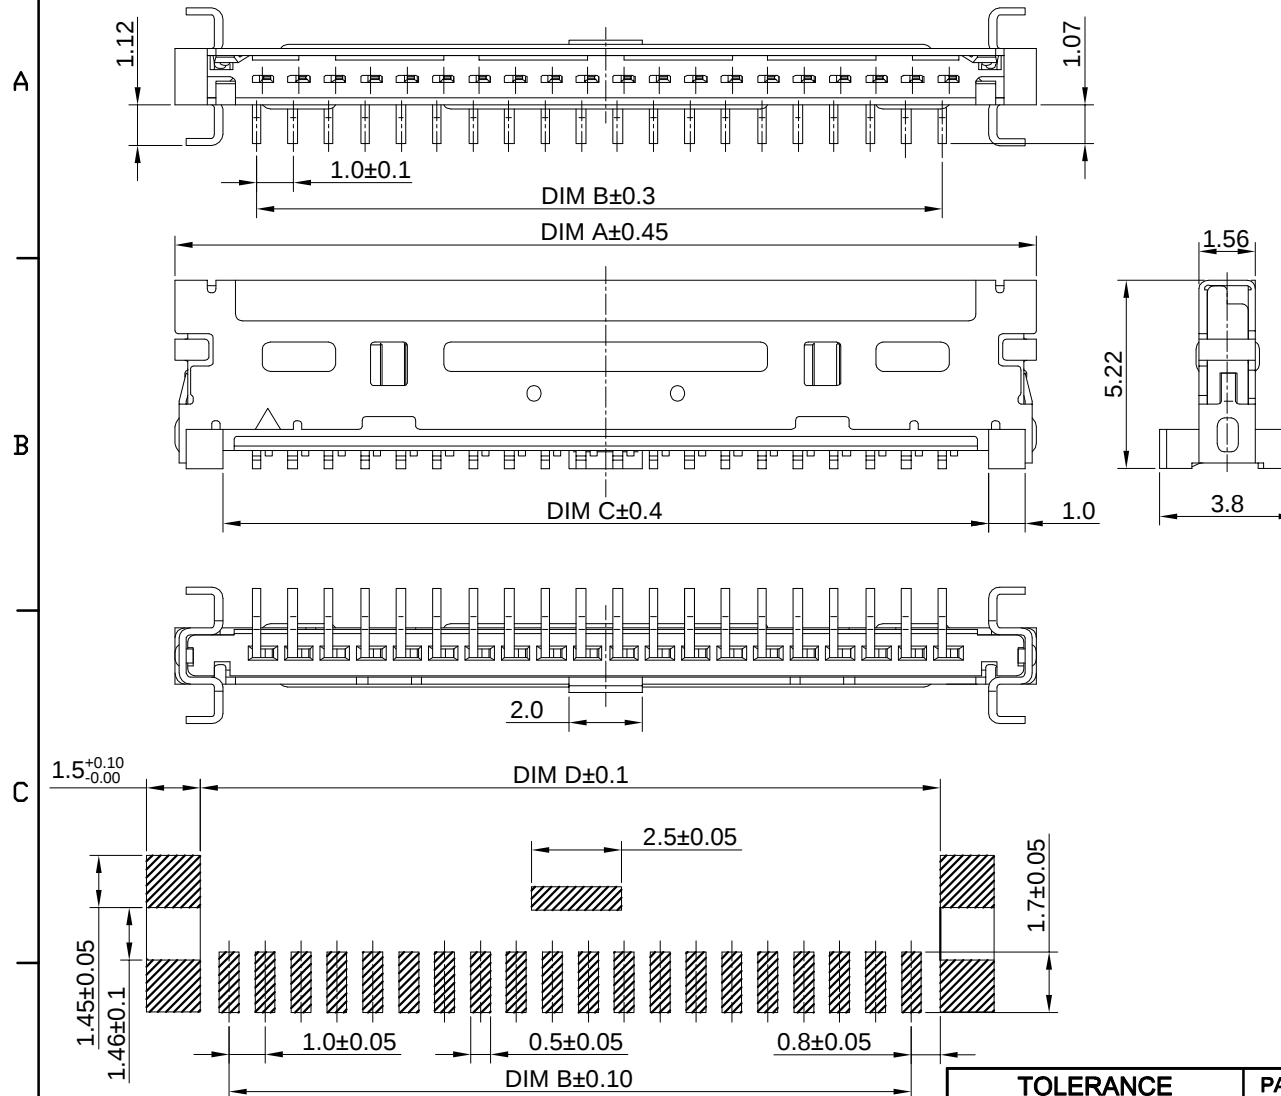

A		FOR NEW DRAWING	GuobaoLi	2017.06.02
REV.	ECN NO	REVISION RECORD	DRAW	DATE

6 QMI-P12-05-05