

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40℃~+105℃
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2005HK-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

			20.00	22.50	22
38.00	40.50	40	18.00	20.50	20
36.00	38.50	38	16.00	18.50	18
34.00	36.50	36	14.00	16.50	16
32.00	34.50	34	12.00	14.50	14
30.00	32.50	32	10.00	12.50	12
28.00	30.50	30	8.00	10.50	10
26.00	28.50	28	6.00	8.50	8
24.00	26.50	26	4.00	6.50	6
22.00	24.50	24	2.00	4.50	4
A	B	PIN	A	B	PIN

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2005HK-XP-X-HF

DRAWING NO.

C-FU2005HK-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE

1OF1

SCALE

5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.00mm Pitch Wire To Board Housing

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

QMI-P17-06-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:




- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2005H-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.


9.Ordering Information & Dimensions

			20.00	24.00	22
38.00	42.00	40	18.00	22.00	20
36.00	40.00	38	16.00	20.00	18
34.00	38.00	36	14.00	18.00	16
32.00	36.00	34	12.00	16.00	14
30.00	34.00	32	10.00	14.00	12
28.00	32.00	30	8.00	12.00	10
26.00	30.00	28	6.00	10.00	8
24.00	28.00	26	4.00	8.00	6
22.00	26.00	24	2.00	6.00	4
A	B	PIN	A	B	PIN

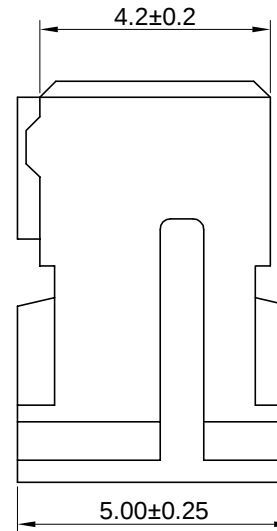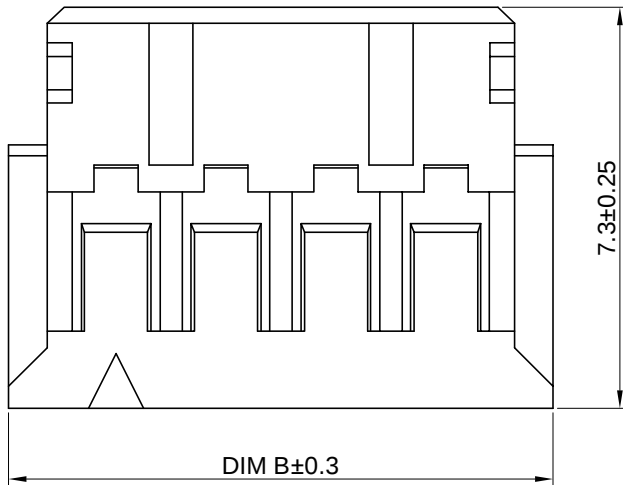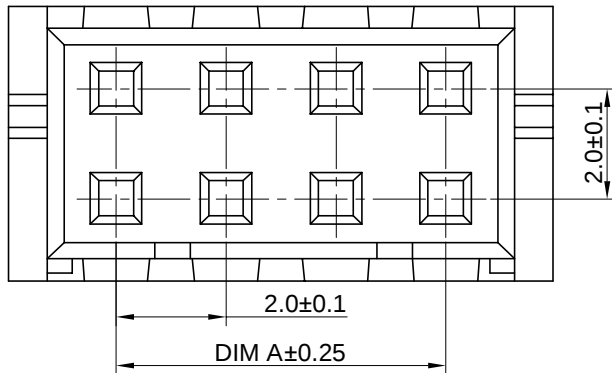

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2005H-XP-X-HF

DRAWING NO.

C-FU2005H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE

1OF1

REV.

SCALE

5: 1

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.00mm Pitch Wire To Board Housing

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE