

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PBT UL94V-0
- 8.Bill Of Part No.:

FU2540H-AXP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions

30.48	27.94	12
27.94	25.40	11
25.40	22.86	10
22.86	20.32	9
20.32	17.78	8
17.78	15.24	7
15.24	12.70	6
12.70	10.16	5
10.16	7.62	4
7.62	5.08	3
5.08	2.54	2
DIM B	DIM A	PIN

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2540H-AXP-X-HF

DRAWING NO.

C-FU2540H-AXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1




REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.54mm Pitch Wire To Board Housing

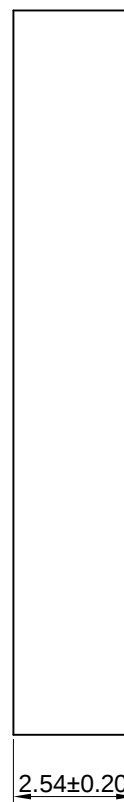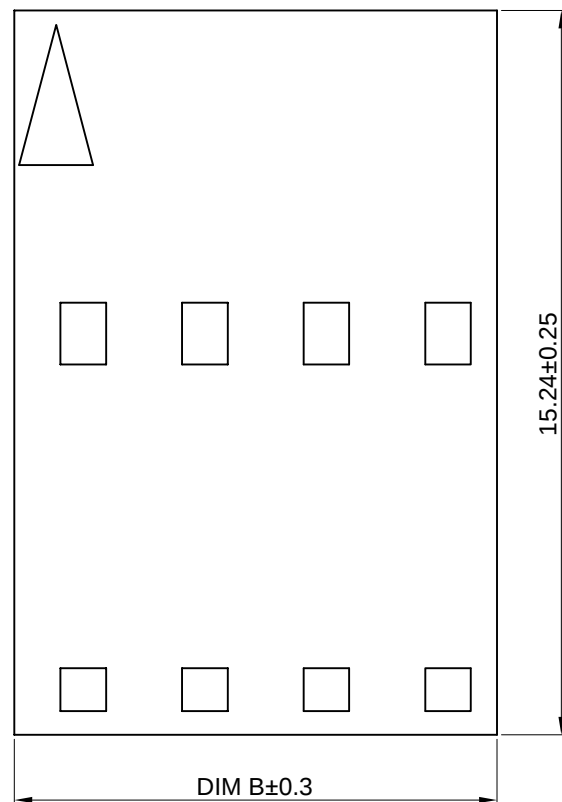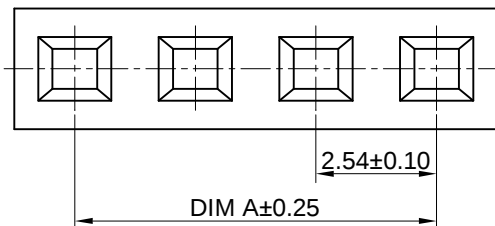

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PBT UL94V-0

8.Bill Of Part No.:

FU2540H-XP-X-HF


Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.

9.Ordering Information & Dimensions

30.48	27.94	12
27.94	25.40	11
25.40	22.86	10
22.86	20.32	9
20.32	17.78	8
17.78	15.24	7
15.24	12.70	6
12.70	10.16	5
10.16	7.62	4
7.62	5.08	3
5.08	2.54	2
DIM B	DIM A	PIN

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2540H-XP-X-HF

DRAWING NO.

C-FU2540H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1






REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.54mm Pitch Wire To Board Housing

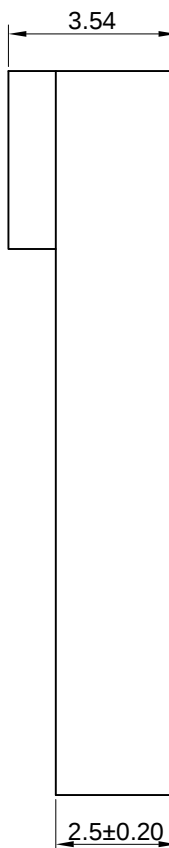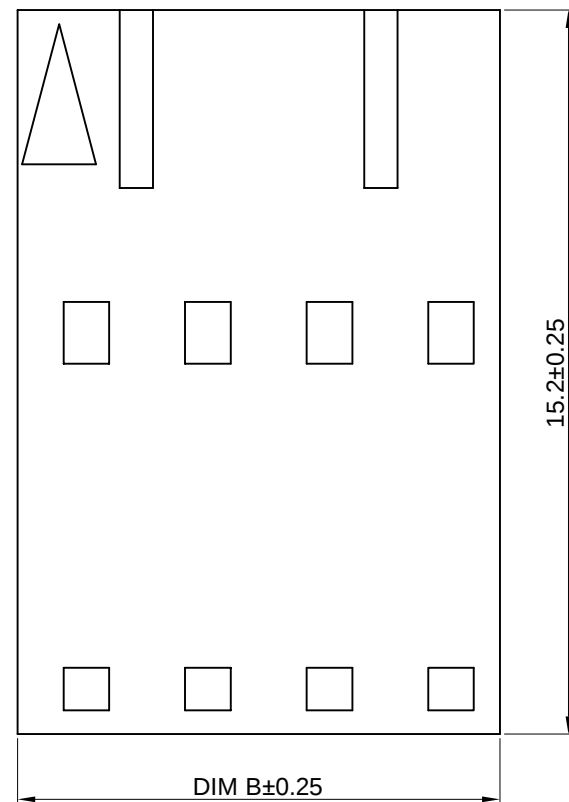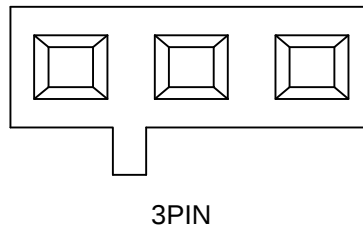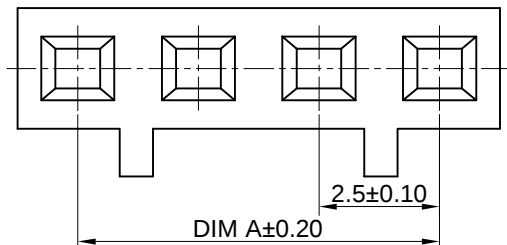

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Material:PBT UL94V-0






8.Bill Of Part No.:

FU2540HK-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.


9.Ordering Information & Dimensions

30.48	27.94	12
27.94	25.40	11
25.40	22.86	10
22.86	20.32	9
20.32	17.78	8
17.78	15.24	7
15.24	12.70	6
12.70	10.16	5
10.16	7.62	4
7.62	5.08	3
5.08	2.54	2
DIM B	DIM A	PIN

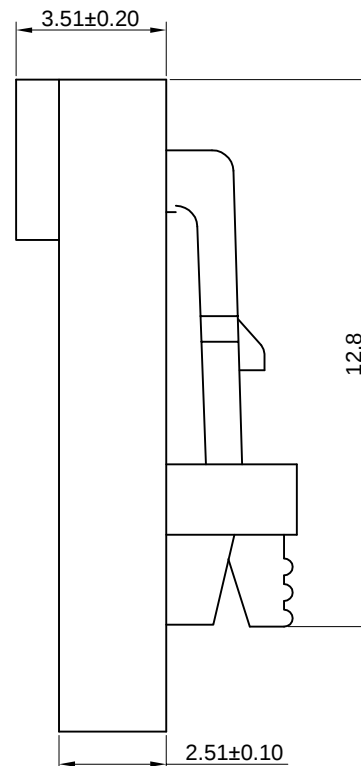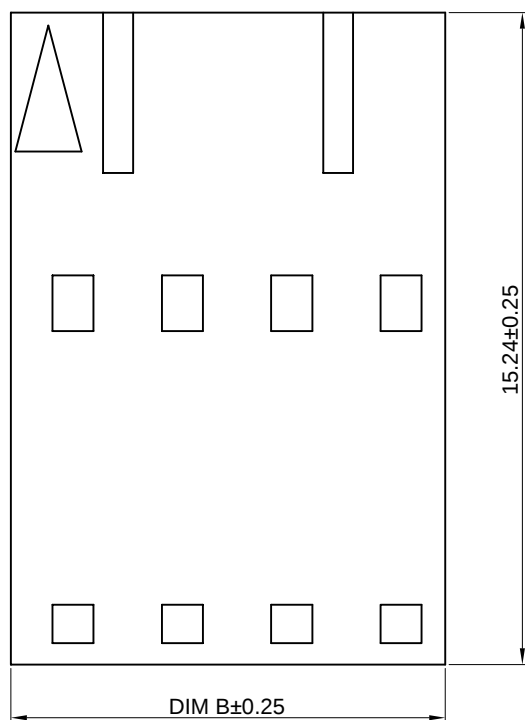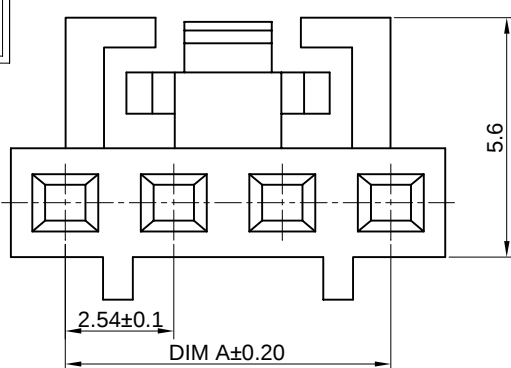

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2540HK-XP-X-HF

DRAWING NO.

C-FU2540HK-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.54mm Pitch Wire To Board Housing

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.05