



RoHS

## CUST INFORMATION.


| PART NO. | DRAWING NO. | REV. |
|----------|-------------|------|
| NA       | NA          | NA   |

## Specifications:


- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Spec. PLS. Refer To PS-FU2540

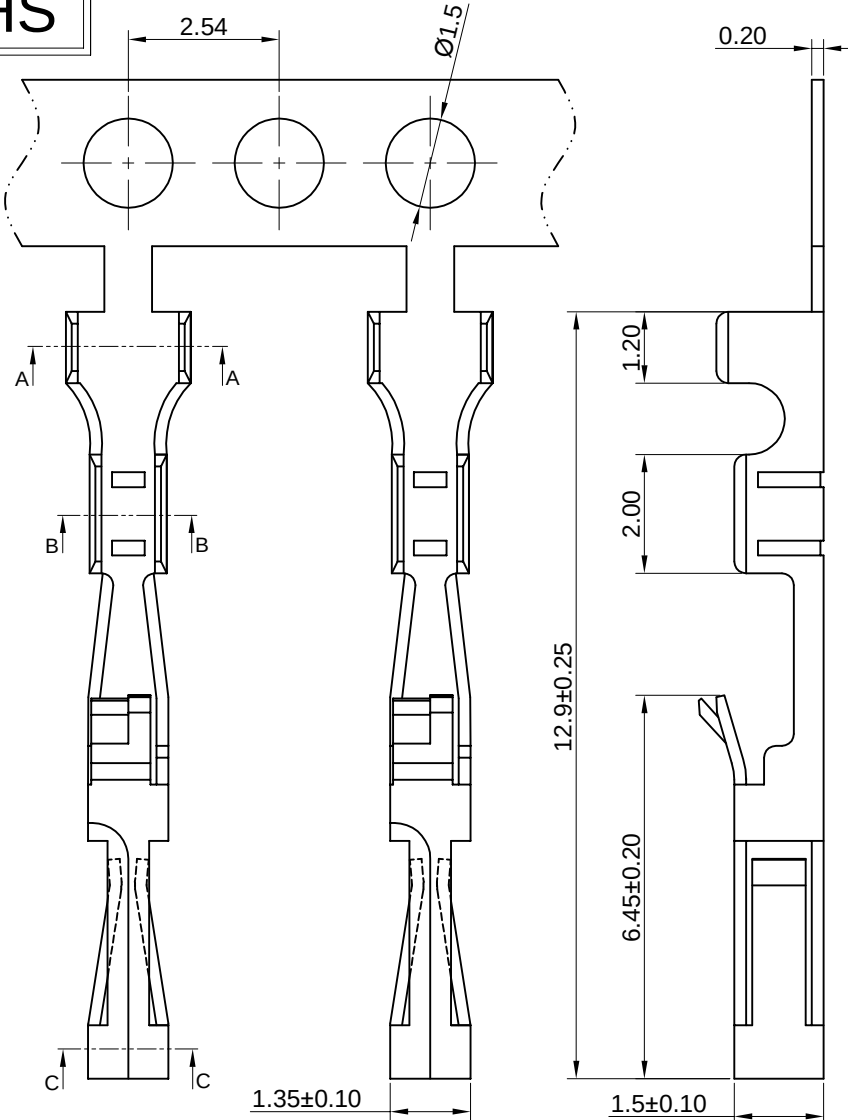

SEC:A-A



SEC:B-B




SEC:C-C

| Part No.      | Wire Range | Insulation O.D. | Material        | Finish          | Qty/reel |
|---------------|------------|-----------------|-----------------|-----------------|----------|
| FU2540-T0P-B1 | AWG#24~#28 | 1.6mm Max       | Phosphor Bronze | Tin over Nickel | 15000Pcs |
| FU2540-T0P-B2 | AWG#24~#28 | 1.6mm Max       | Phosphor Bronze | Au over Nickel  | 15000Pcs |

## TOLERANCE

|            |             |
|------------|-------------|
| X.         | X.XXX ±0.1  |
| X.X ±0.30  |             |
| X.XX ±0.20 | Angular ±2° |

UNIT:  
mm

DWG TYPE.

Customer Drawing

## PART NO.

FU2540-T0P-XX

## DRAWING NO.

C-FU2540-T0P-XX

APPROVED BY

CHECKED BY

DRAWN BY

PAGE

1 OF 1

REV.

SCALE

10:1

A

东莞市福朗连接器制造有限公司  
DongGuan FuLang Connector Manufacturing Co., LTD

## TITLE.

2.54mm Crimp Style Connectors

| REV. | ECN NO | REVISION RECORD | DRAW     | DATE       |
|------|--------|-----------------|----------|------------|
| A    |        | For New Drawing | GuobaoLi | 2017.12.06 |