



RoHS

CUST INFORMATION.


PART NO.
NADRAWING NO.
NAREV.
NA

Specifications:


- 1.Current rating:3A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:20mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:800V AC/minute
- 7.Spec. PLS. Refer To PS-FU25 40

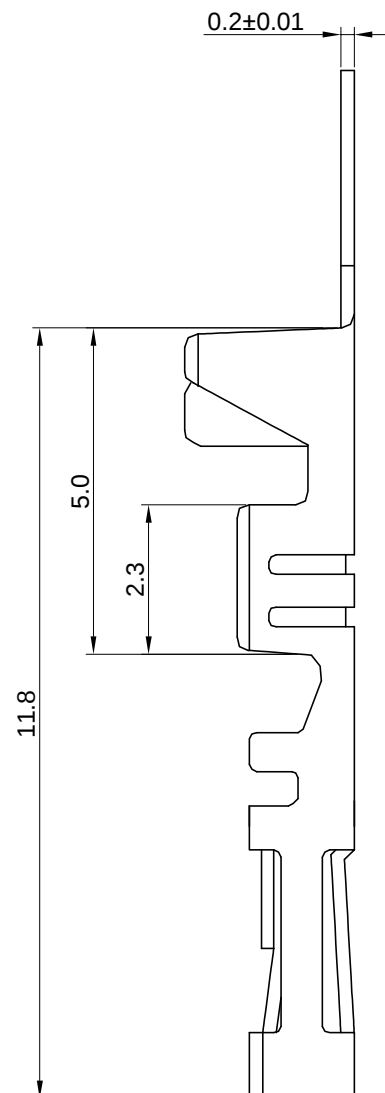

SEC A-A



SEC B-B



SEC C-C

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU2541-T0B-B1	AWG#22~#28	1.6mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs
FU2541-T0B-B2	AWG#22~#28	1.6mm Max	Phosphor Bronze	Au over Nickel	15000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD		
X. X.X±0.30 X.XX±0.20	X.XXX ±0.10 Angular ±2°	FU2541-T0B-XX	DRAWING NO. C-FU2541-T0B-XX		
DWG TYPE. Customer Drawing		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1 SCALE 1: 1
					REV. A

A		For New Drawing	GuobaoLi	2017.12.24
REV.	ECN NO	REVISION RECORD	DRAW	DATE