

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:4A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1000V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2543H-AXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.

9.Ordering Information & Dimensions

			23.46	20.32	9
41.42	38.10	16	20.82	17.78	8
37.80	35.56	15	18.38	15.24	7
36.16	32.02	14	15.84	12.70	6
33.62	30.48	13	13.30	10.16	5
31.08	27.94	12	10.76	7.62	4
28.54	25.40	11	8.22	5.08	3
26.00	22.86	10	5.68	2.54	2
DIM B	DIM A	PIN	DIM B	DIM A	PIN

TOLERANCE

X.	X.XXX ±0.1
X.X ±0.30	
X.XX ±0.20	Angular ±2°



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2543H-AXP-X-HF

DRAWING NO.

C-FU2543H-AXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.54mm Pitch Wire To Board Housing

RoHS

Circuit 1

2.54±0.10

DIM A±0.25

6.7±0.25

2.2±0.20

12.85±0.25

4.9±0.25

DIM B±0.3

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

QMI-P17-06-05

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:




- 1.Current rating:4A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1000V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2543H-XP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.


9.Ordering Information & Dimensions

			23.46	20.32	9
41.42	38.10	16	20.82	17.78	8
37.80	35.56	15	18.38	15.24	7
36.16	32.02	14	15.84	12.70	6
33.62	30.48	13	13.30	10.16	5
31.08	27.94	12	10.76	7.62	4
28.54	25.40	11	8.22	5.08	3
26.00	22.86	10	5.68	2.54	2
DIM B	DIM A	PIN	DIM B	DIM A	PIN

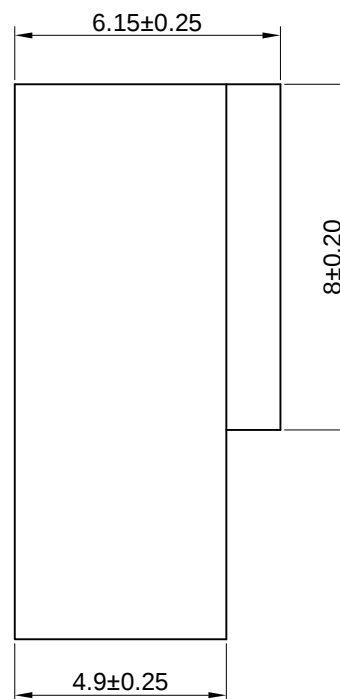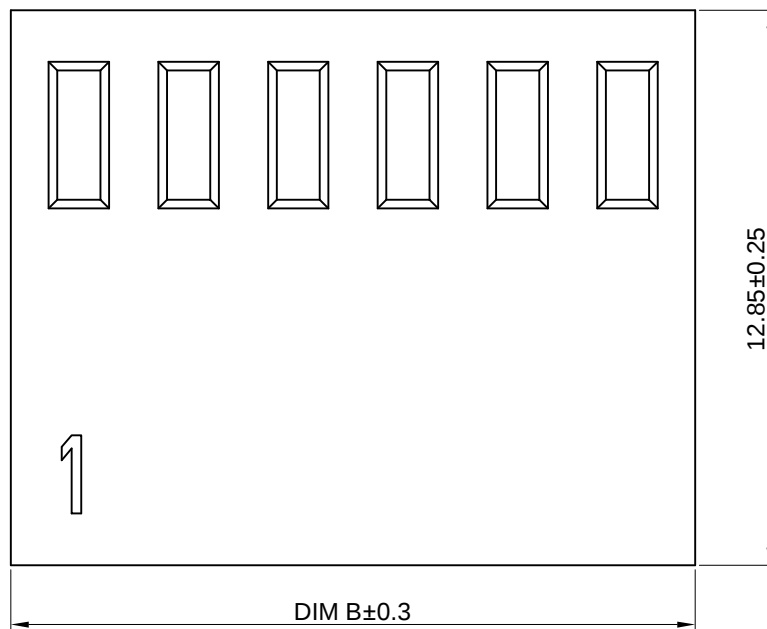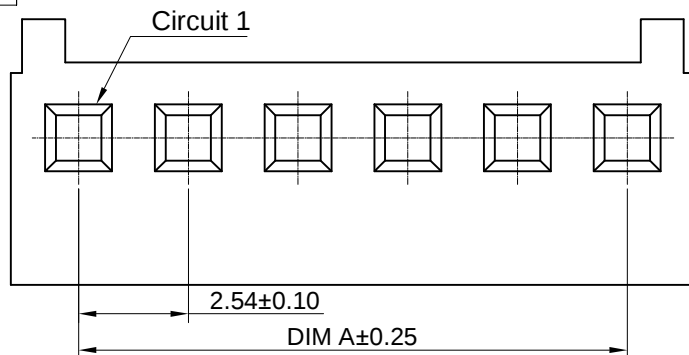

TOLERANCE

X. XXX ±0.1
X.X ±0.30
X.XX ±0.20



UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2543H-XP-X-HF

DRAWING NO.

C-FU2543H-XP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE
1 OF 1

SCALE
5: 1

REV.

A

东莞市福朗连接器制造有限公司
DongGuan FuLang Connector Manufacturing Co., LTD

TITLE.

2.54mm Pitch Wire To Board Housing

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:




- 1.Current rating:4A AC,DC
- 2.Voltage rating:250V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1000V AC/minute
- 7.Material:PA66 UL94V-0
- 8.Bill Of Part No.:

FU2543H-BXP-X-HF

Pin:	Material Color
2	A : White
3	B : Black
4	C : Red
.	D : Orangr
.	E : Yellow
.	F : Green
.	.
.	.
.	.


9.Ordering Information & Dimensions

			23.46	20.32	9
41.42	38.10	16	20.82	17.78	8
37.80	35.56	15	18.38	15.24	7
36.16	32.02	14	15.84	12.70	6
33.62	30.48	13	13.30	10.16	5
31.08	27.94	12	10.76	7.62	4
28.54	25.40	11	8.22	5.08	3
26.00	22.86	10	5.68	2.54	2
DIM B	DIM A	PIN	DIM B	DIM A	PIN

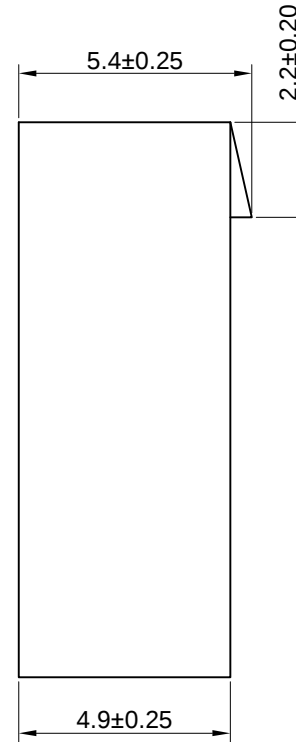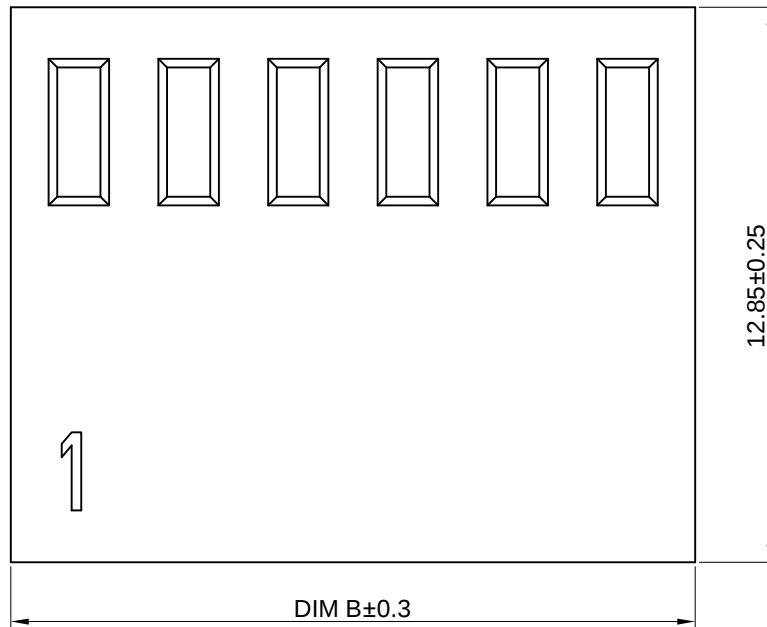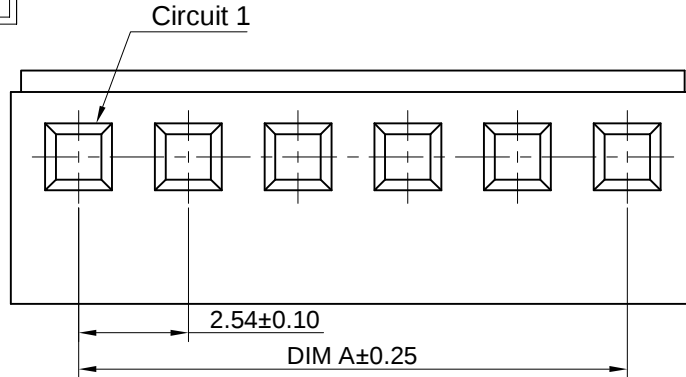

TOLERANCE

X. XXX ±0.1
X.X ±0.30
X.XX ±0.20



Angular ±2°

UNIT:
mm

DWG TYPE.

Customer Drawing

PART NO.

FU2543H-BXP-X-HF

DRAWING NO.

C-FU2543H-BXP-X-HF

APPROVED BY

CHECKED BY

DRAWN BY

PAGE

1 OF 1

REV.

SCALE

5: 1

A

A		For New Drawing	GuobaoLi	2017.12.05
REV.	ECN NO	REVISION RECORD	DRAW	DATE