



RoHS


CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:
1.Current rating:50A AC,DC
2.Voltage rating:1.5V AC,DC
3.Temperature range:-40°C~+105°C
4.Contact resistance:20mΩMax.
5.Insulation resistance:100MΩMin.
6.Withstanding voltage:500V AC/minute
7.Spec. PLS. Refer To PS-FU1201

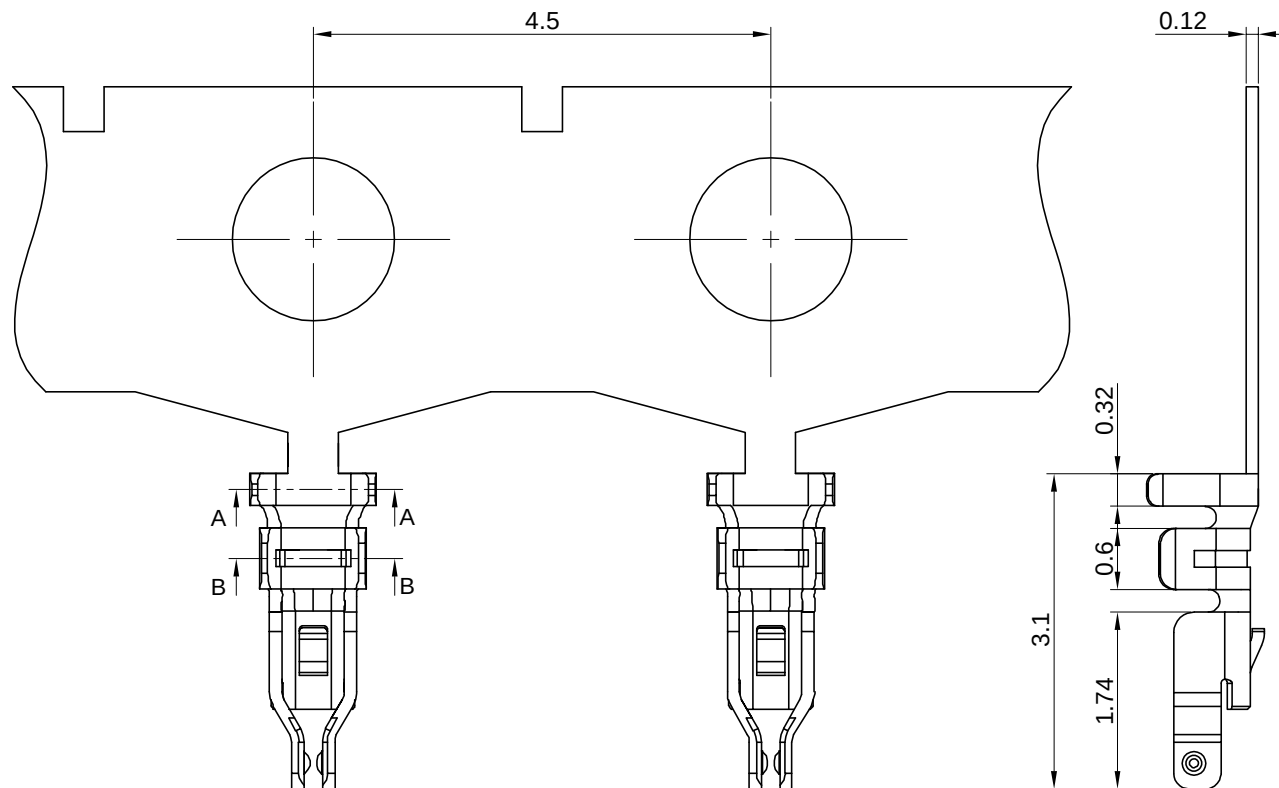

SEC A-A



SEC B-B

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU1201-TAP-B2	AWG#28~#32	0.7mm Max	Phosphor Bronze	Au over Nickel	15000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD		
X.	X.XXX ±0.10	FU1201-TAP-B2	TITLE. 1.2mm PITCH CRIMP TERMINAL		
X.X±0.30					
X.XX±0.20	Angular ±2°	DRAWING NO.			
		C-FU1201-TAP-B2			
UNIT:		APPROVED BY	CHECKED BY	DRAWN BY	PAGE
mm					1 OF 1
DWG TYPE.					SCALE
Customer Drawing					1: 1
					REV.
					A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2018.04.10