


RoHS

CUST INFORMATION.


PART NO.
NADRAWING NO.
NAREV.
NA

Specifications:

- 1.Current rating:10A AC,DC
- 2.Voltage rating:300V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Spec. PLS. Refer To PS-FU5001/5002

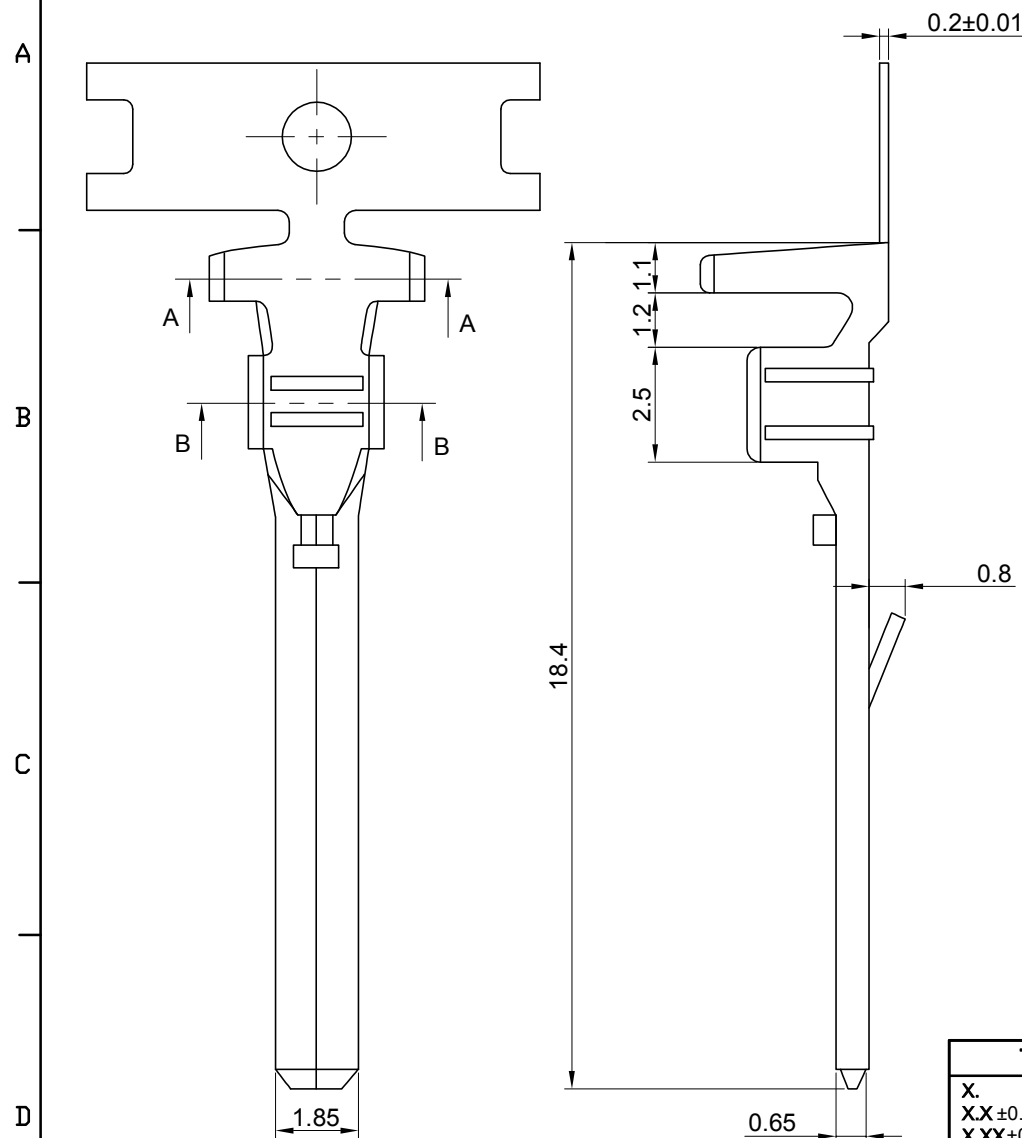

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU5001-T0P-B1	AWG#16~#20	3.10 Max	Phosphor Bronze	Tin over Nickel	4000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司 DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD		
X.	X.XXX ±0.10	FU5001-T0P-B1	TITLE. 5.0mm Pitch Crimp Terminal		
X.X ±0.30					
X.XX ±0.20	Angular ±2°	DRAWING NO. C-FU5001-T0P-B1			
		APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
		DWG TYPE. Customer Drawing			SCALE 1: 1
					REV. A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.28



RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:

- 1.Current rating:10A AC,DC
- 2.Voltage rating:300V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:10mΩMax.
- 5.Insulation resistance:1000MΩMin.
- 6.Withstanding voltage:1500V AC/minute
- 7.Spec. PLS. Refer To PS-FU5001/5002

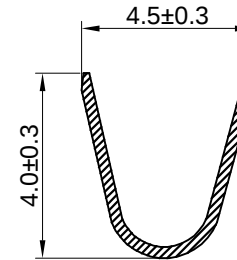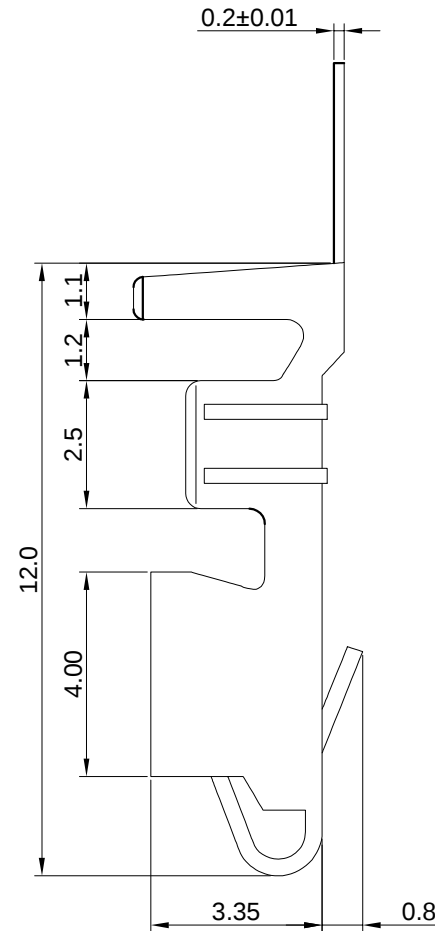

SEC A-A



SEC B-B

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU5002-T0P-B1	AWG#16~#20	3.10 Max	Phosphor Bronze	Tin over Nickel	4000Pcs

TOLERANCE		PART NO.	东莞市福朗连接器制造有限公司				
X.	X.XXX ±0.10	FU5002-T0P-B1	DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD				
X.X ±0.30		DRAWING NO.	TITLE. 5.0mm Pitch Crimp Terminal				
X.XX±0.20	Angular ±2°						
		C-FU5002-T0P-B1					
UNIT:		APPROVED BY	CHECKED BY	DRAWN BY	PAGE		
mm					1OF1		
DWG TYPE.					Customer Drawing		SCALE
							1: 1
					REV.		
					A		

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		For New Drawing	GuobaoLi	2017.12.28