


WIRE TO BOARD SERIES

FU2009 2.00MM PITCH SERIES

Specifications:

- ◆ Rated Voltage: 250V AC,DC
- ◆ Rated Current: 2A AC,DC
- ◆ Withstand Voltage: 800V AC/minute
- ◆ Contact Resistance: 20mΩ Max.
- ◆ Insulation Resistance: 1000MΩ Min.
- ◆ Temperature Range: -40℃~+105℃
- ◆ Applicable Wire Range: AWG #24~#30
- ◆ Insulation O.D.: 1.30mmMax
- ◆ UL: Recognized No. E496848

ITEM	PART NO.	MATERIAL	POLES	Q'TY/REEL
Terminal	FU2009-T0B-XX	Brass		14000PCS
	FU2009-TRB-XX	Brass		10000PCS
HSG	FU2009H-XP-X-HF	Nylon 66 UL94V-0	02~15	1000PCS
	FU2009HR-XP-X-HF	Nylon 66 UL94V-0	02~15	1000PCS




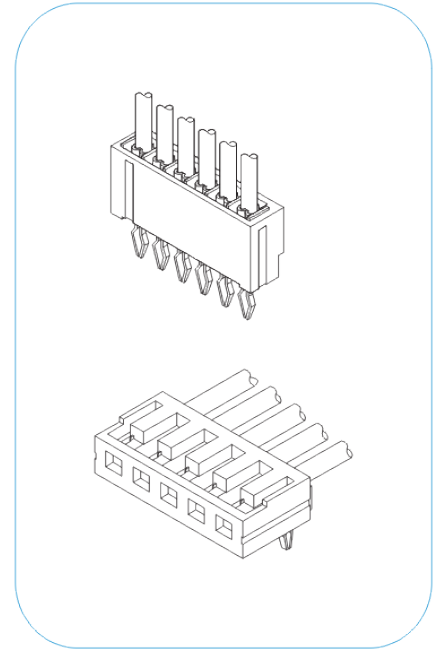


FU2009-T0B-XX

FU2009-TRB-XX

FU2009H-XP-X-HF

FU2009HR-XP-X-HF



CONNECTOR PRODUCT NUMBER

Terminal Ordering Code

FU2009
TXX
XX

① — ②③④ — ⑤

①: Series No.FU2009

②: Contact Terminal

③: Terminal Crimping Spec

0 : Ordinary type

1 : Low foot type

2 : High foot type

④: Conductor Material Type

P: Phosphor Bronze

B: Brass

⑤: Conductor Surface Finish

B1: Bright-Sn

B2: Gold-Flash

HSG And Wafer Ordering Code

FU2009
H
X
XXP
X
HF

① — ② — ③ — ④ — ⑤ — ⑥

③: Insulation Material Type

R: Right Angle

⑤: Color

A: Black

B: Brown

C: Others

④: Total Number of Contacts

XXP: Single Row

⑥: Halogen-free

①: Series No.FU2009

②: Conductor Type

H: Plastic Housing