


WIRE TO BOARD SERIES

FU2510 2.50MM PITCH SERIES

Specifications:

- ◆ Rated Voltage: 250V AC,DC
- ◆ Rated Current: 3A AC,DC
- ◆ Withstand Voltage: 1000V AC/minute
- ◆ Contact Resistance: 10mΩ Max.
- ◆ Insulation Resistance: 1000MΩ Min.
- ◆ Temperature Range: -40℃~+105℃
- ◆ Applicable Wire Range: AWG #22~#28
- ◆ Insulation O.D.: 1.90mmMax
- ◆ UL: Recognized No. E496848

ITEM	PART NO.	MATERIAL	POLES	Q'TY/REEL
Terminal	FU2510-T0B-XX	Brass		10000PCS
	FU2510-TRB-XX	Brass		10000PCS
HSG	FU2510HV-XP-X-HF	Nylon 66 UL94V-0	02~16	1000PCS
	FU2510HR-XP-X-HF	Nylon 66 UL94V-0	02~16	1000PCS




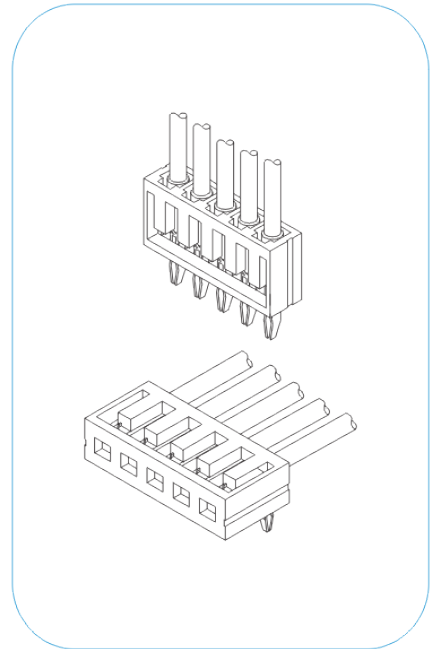


FU2510-T0B-XX

FU2510-TRB-XX

FU2510HV-XP-X-HF

FU2510HR-XP-X-HF



CONNECTOR PRODUCT NUMBER

Terminal Ordering Code

FU2510 T X X XX

① — ② ③ ④ — ⑤

①: Series No.FU2501

②: Contact Terminal

③: Terminal Crimping Spec

0 : Ordinary type
1 : Low foot type
2 : High foot type

④: Conductor Material Type

P: Phosphor Bronze
B: Brass

⑤: Conductor Surface Finish

B1: Bright-Sn
B2: Gold-Flash

HSG And Wafer Ordering Code

FU2510 H XX XXP X HF

① — ② ③ — ④ — ⑤ — ⑥

③: Insulation Material Type

V: Straight Angle
R: Right Angle

⑤: Color

A: Black
B: Brown
C: Others

④: Total Number of Contacts

XXP: Single Row

⑥: Halogen-free

①: Series No.FU2501

②: Conductor Type

H: Plastic Housing