



RoHS

CUST INFORMATION.


PART NO.	DRAWING NO.	REV.
NA	NA	NA

Specifications:


- 1.Current rating:1A AC,DC
- 2.Voltage rating:100V AC,DC
- 3.Temperature range:-40°C~+105°C
- 4.Contact resistance:30mΩMax.
- 5.Insulation resistance:500MΩMin.
- 6.Withstanding voltage:300V AC/minute
- 7.Spec. PLS. Refer To PS-FU1004

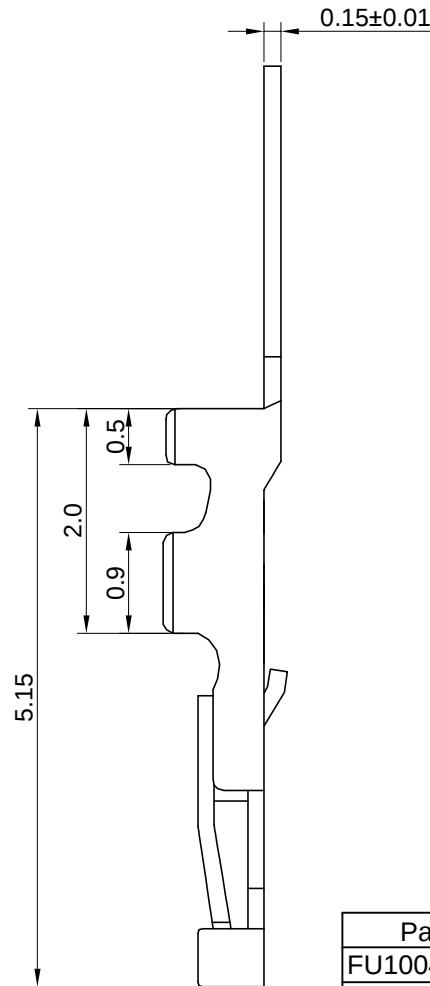

SEC: A-A



SEC: B-B



SEC: C-C

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
FU1004-T0P-B1	AWG#28~#32	0.6mm Max	Phosphor Bronze	Tin over Nickel	15000Pcs
FU1004-T0P-B2	AWG#28~#32	0.6mm Max	Phosphor Bronze	Au over Nickel	15000Pcs
TOLERANCE		PART NO.		东莞市福朗连接器制造有限公司	
X.	X.XXX ±0.10	FU1004-T0P-XX		DONGGUAN FULANG CONNECTOR MANUFACTURING Co., LTD	
X.X ±0.30		DRAWING NO.		TITLE. 1.00mm PITCH CRIMP TERMINAL	
X.XX ±0.20	Angular ±2°	C-FU1004-T0P-XX			
	UNIT: mm	APPROVED BY	CHECKED BY	DRAWN BY	PAGE 1 OF 1
DWG TYPE.	Customer Drawing				SCALE 1: 1
					REV. A

REV.	ECN NO	REVISION RECORD	DRAW	DATE
A		FOR NEW DRAWING	GuobaoLi	2017.06.02